


Finally I made:

USB Type-B is obsolete
now it's better to use type-C

Program / UART Monitor, but I found monitor function is
not so convenient because the host must switch COM port
every time to re-programm MCU

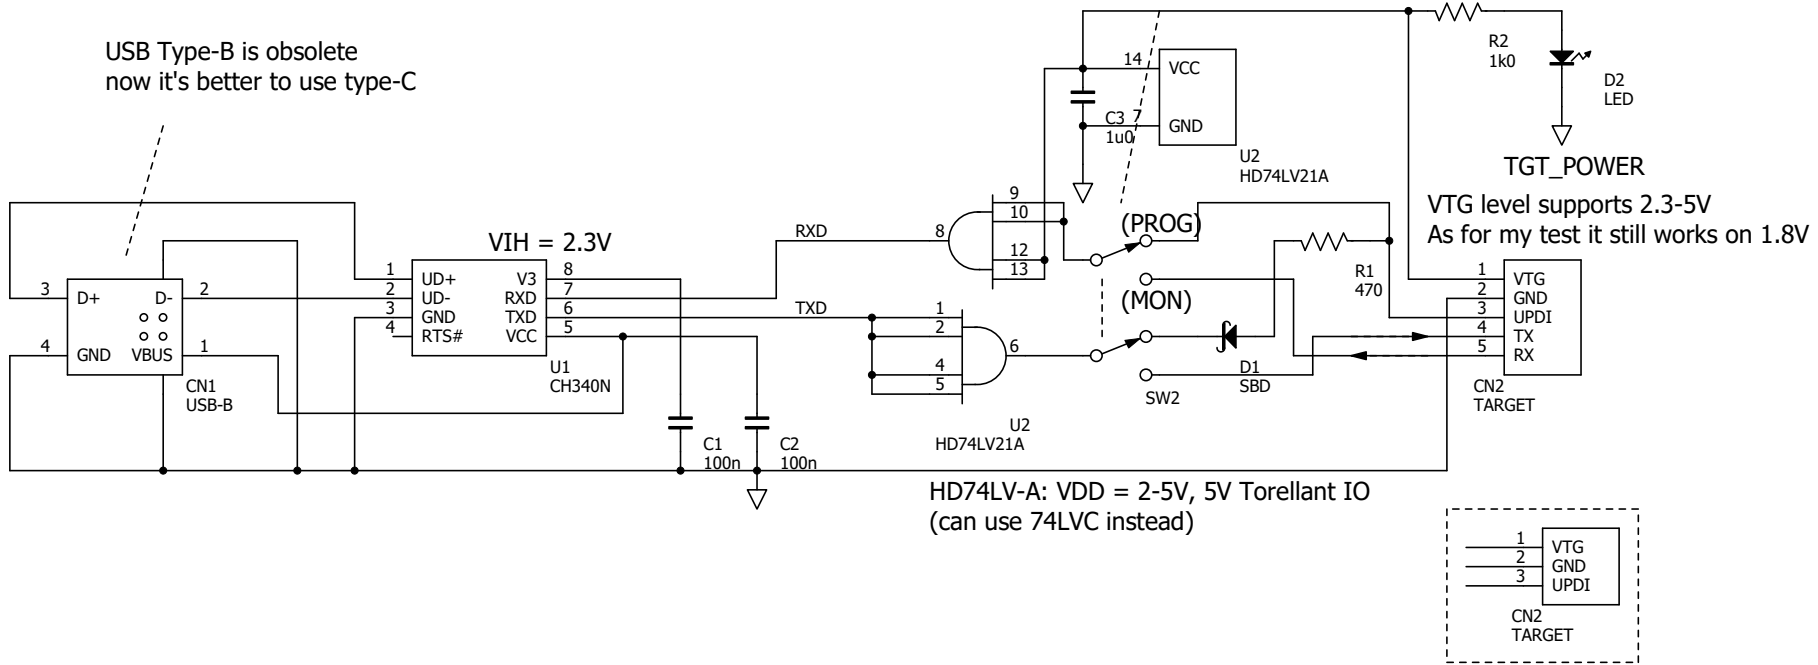

HD74LV-A: VDD = 2-5V, 5V Tolerant IO
(can use 74LVC instead)

if no need for TX/RX, use 3P connector

UPDI Programmer Based on PyUPDI

Original: <https://github.com/mraadrvark/pyupdi>

Modified by Eleken: rev_c1815@yahoo.co.jp